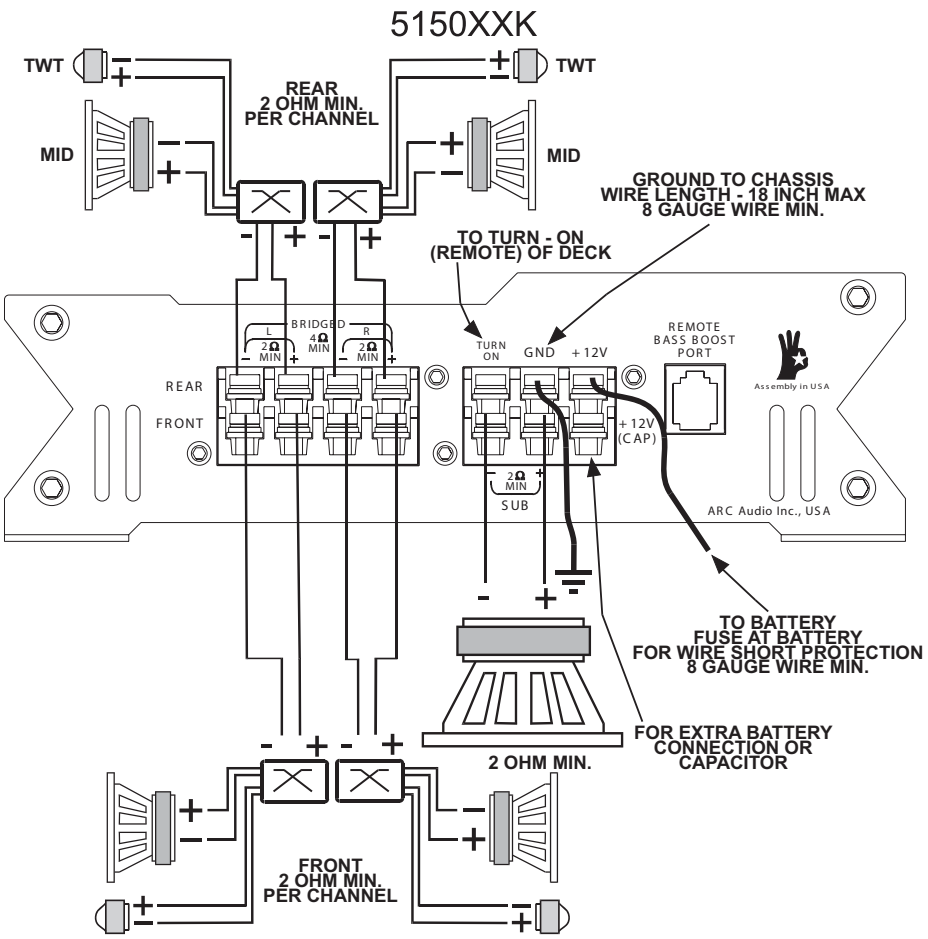
5150XXK
TWT
TWT
REAR
2 OHM MIN.
PER CHANNEL
MID
MID
GROUND TO CHASSIS
WIRE LENGTH - 18 INCH MAX
8 GAUGE WIRE MIN.
TO TURN - ON
(REMOTE) OF DECK
BRIDGED
L
R
2Ω MIN
4Ω MIN
2Ω MIN
REAR
FRONT
TURN ON
GND
+ 12V
REMOTE BASS BOOST PORT
Assembly in USA
+ 12V (CAP)
2Ω MIN
SUB
ARC Audio Inc., USA
TO BATTERY
FUSE AT BATTERY
FOR WIRE SHORT PROTECTION
8 GAUGE WIRE MIN.
FOR EXTRA BATTERY
CONNECTION OR
CAPACITOR
2 OHM MIN.
FRONT
2 OHM MIN.
PER CHANNEL

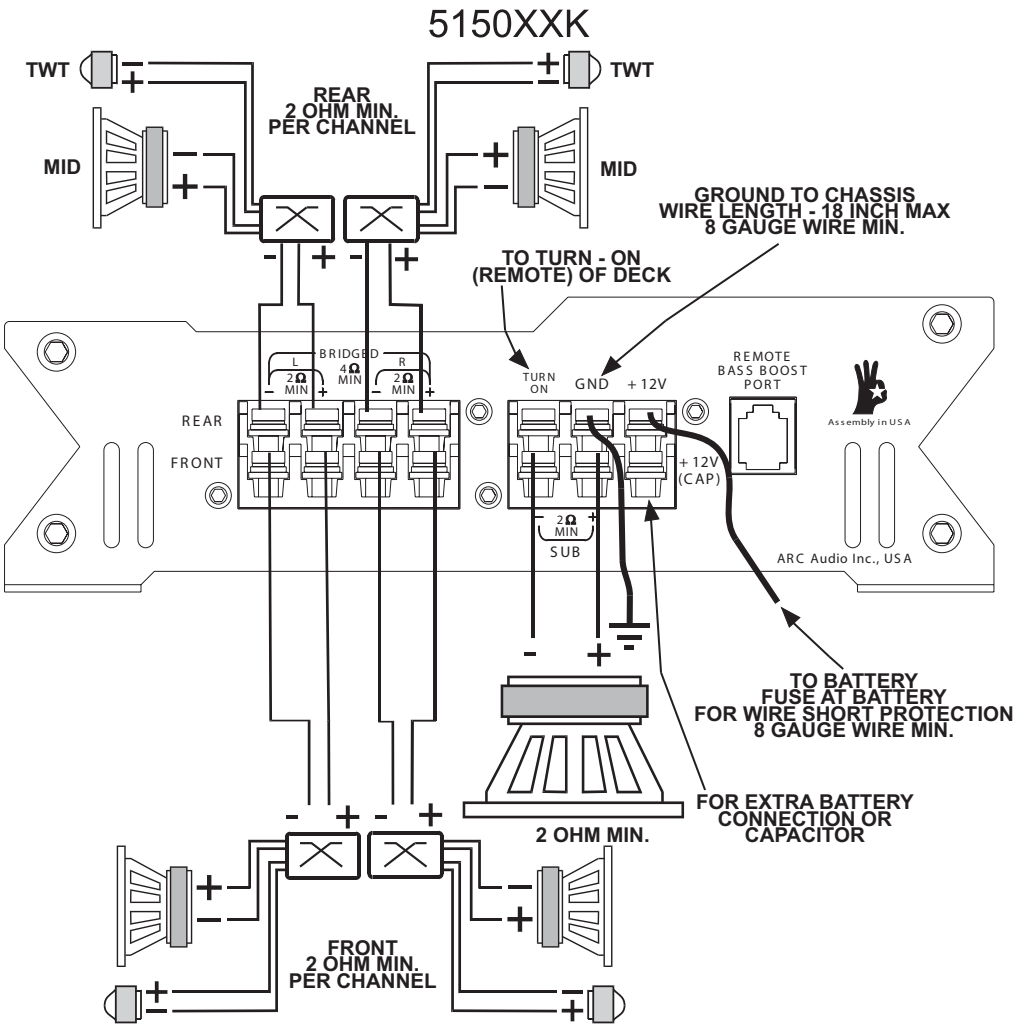
5150XXK
TWT
TWT
REAR
2 OHM MIN.
PER CHANNEL
MID
MID
GROUND TO CHASSIS
WIRE LENGTH - 18 INCH MAX
8 GAUGE WIRE MIN.
TO TURN - ON
(REMOTE) OF DECK
BRIDGED
L
R
2Ω MIN
4Ω MIN
2Ω MIN
REAR
FRONT
TURN ON
GND
+ 12V
REMOTE BASS BOOST PORT
Assembly in USA
+ 12V (CAP)
2Ω MIN
SUB
ARC Audio Inc., USA
TO BATTERY
FUSE AT BATTERY
FOR WIRE SHORT PROTECTION
8 GAUGE WIRE MIN.
FOR EXTRA BATTERY
CONNECTION OR
CAPACITOR
2 OHM MIN.
FRONT
2 OHM MIN.
PER CHANNEL